


QUELARC[®]

HEAVY DUTY PLUGS
AND RECEPTACLES
by PYLE-NATIONAL



SINE Systems ★ PYLE Connectors Corporation

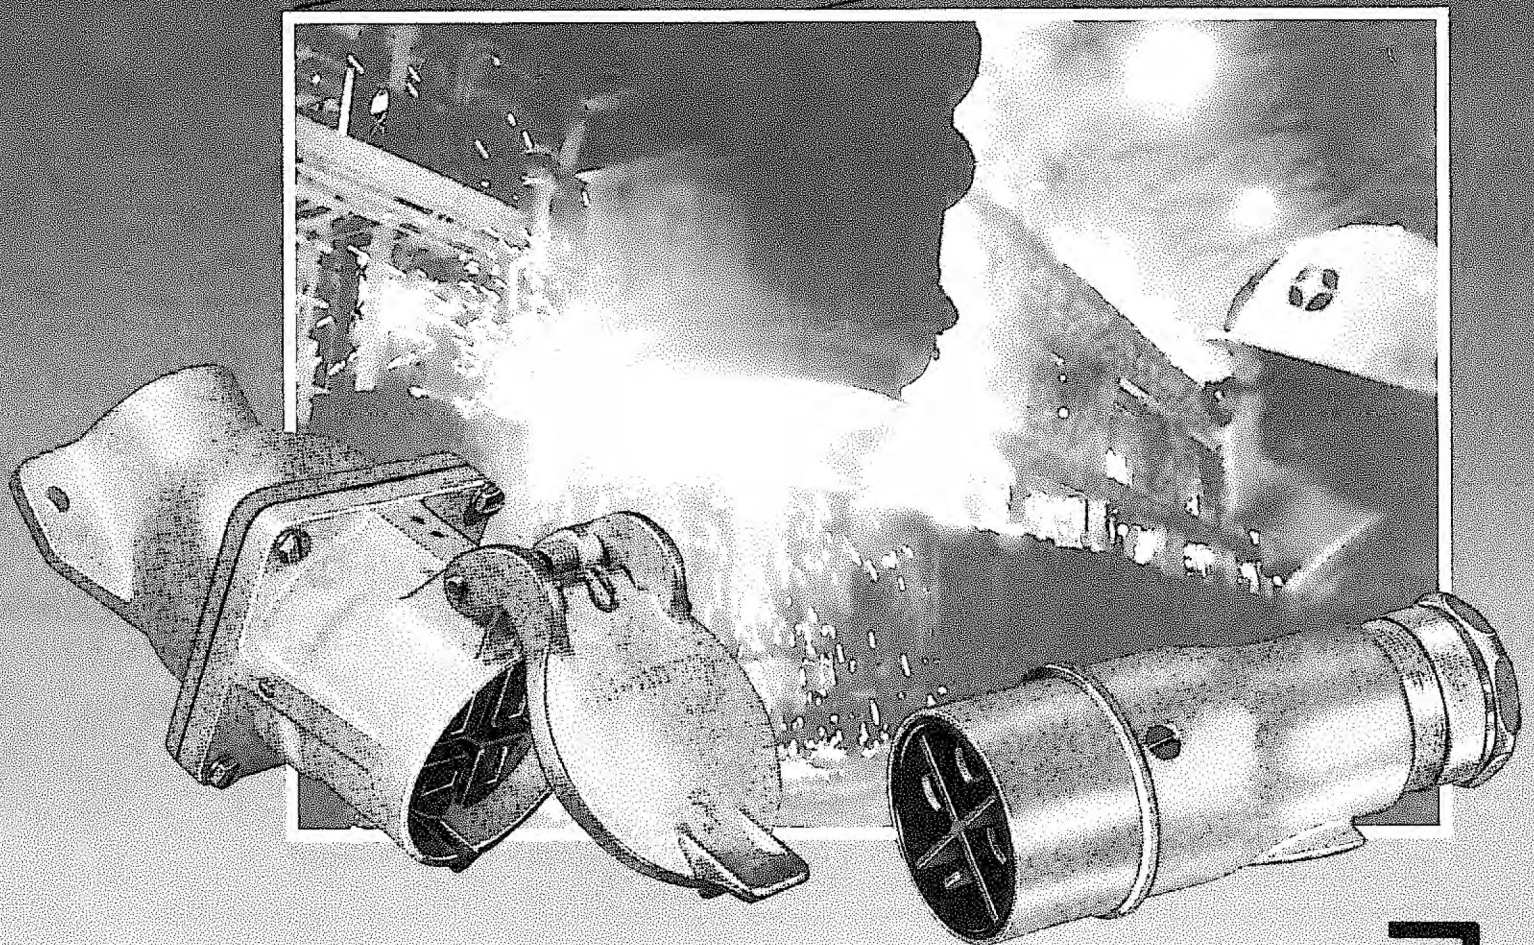

QUELARC®




CIRCUIT BREAKING

PLUGS and RECEPTACLES

FOR PORTABLE AND DETACHABLE ELECTRICAL EQUIPMENT


QUELARC plugs and receptacles are built to withstand the most severe operating conditions. This is proven by years of remarkably dependable service in a wide variety of industrial applications. The many substantial construction features of this extensive line of plugs and receptacles and the high quality of materials and workmanship insure safe operation, uninterrupted service and a long life.

EXTRAORDINARILY LONG INSULATING PATHS insure uninterrupted service in the presence of dampness or current carrying dust.

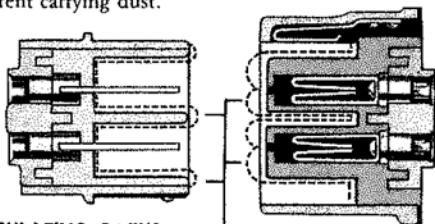

Partitions between male contacts increase length of insulating surfaces to prevent arcing from pole to pole and from poles to ground.

COMPOUND CIRCUIT BREAKING ARC CHAMBERS insure complete snuffing and cooling while the plug is still engaged with the receptacle housing.

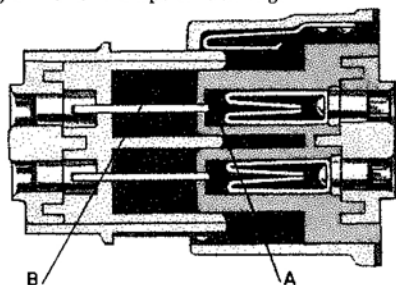

Primary circuit breaking chamber "A" confines the arc during the initial break. Subsequent expansion and cooling of the resulting gas follows in secondary chamber "B" thereby insuring complete safety to the operator when withdrawing the plug at full rated current and rated voltage.

SWITCH BLADE TYPE FLAT CONTACTS insure positive connections and long life.




Spring contact with substantially closed gap at inner and outer ends to provide wiping action and opposed side pressure action as blade enters.

Blade engaged with spring contact under pressure against side walls of insulation cavity and against the full contact surfaces of the blade.

•SAFE •DURABLE •DEPENDABLE

20, 30, 60, 100 and 200 Amperes—250 Volts D.C.,
600 Volts A.C.

2, 3 and 4 Pole—Grounded Through Shell or Extra Long Pole

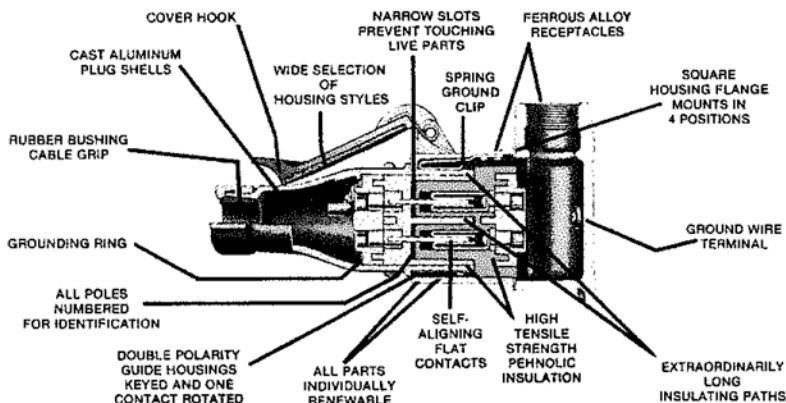


GROUNDING OF PORTABLE ELECTRICAL EQUIPMENT

The diagrams below show the grounding method for plugs and receptacles which apply to the various pole arrangements.


QUELARC Plugs and Receptacles are arranged for grounding so that they may be installed to conform with the National Electrical Code requirements. These plugs and receptacles have an extra pole for the safety circuit wire. This pole is longer than the other poles to insure making contact first and breaking contact last. Grounding is completed through both the extra pole and the bronze spring clip in the receptacle housing.

Typical of All Circuit Arrangements
Grounded Through Shell and Extra Pole
2-WIRE—3-POLE

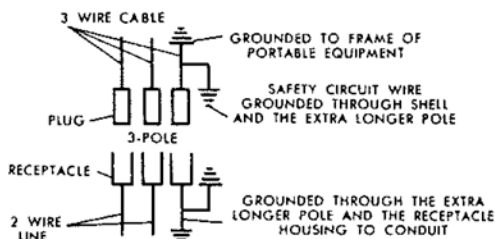

DOUBLE POLARITY GUIDE ARRANGEMENT


Insures correct circuit connections and convenient positioning of the plug at time of insertion.

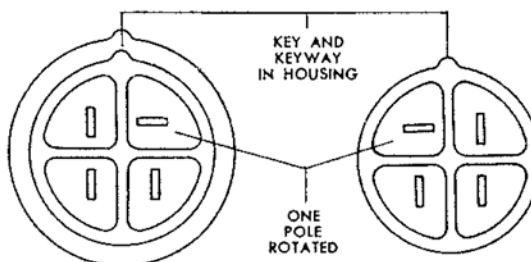

NOTE: QUELARC Interlocking Receptacles are also available, ask for Bulletin #IR-300.


QUELARC®

BASIC COMPONENTS

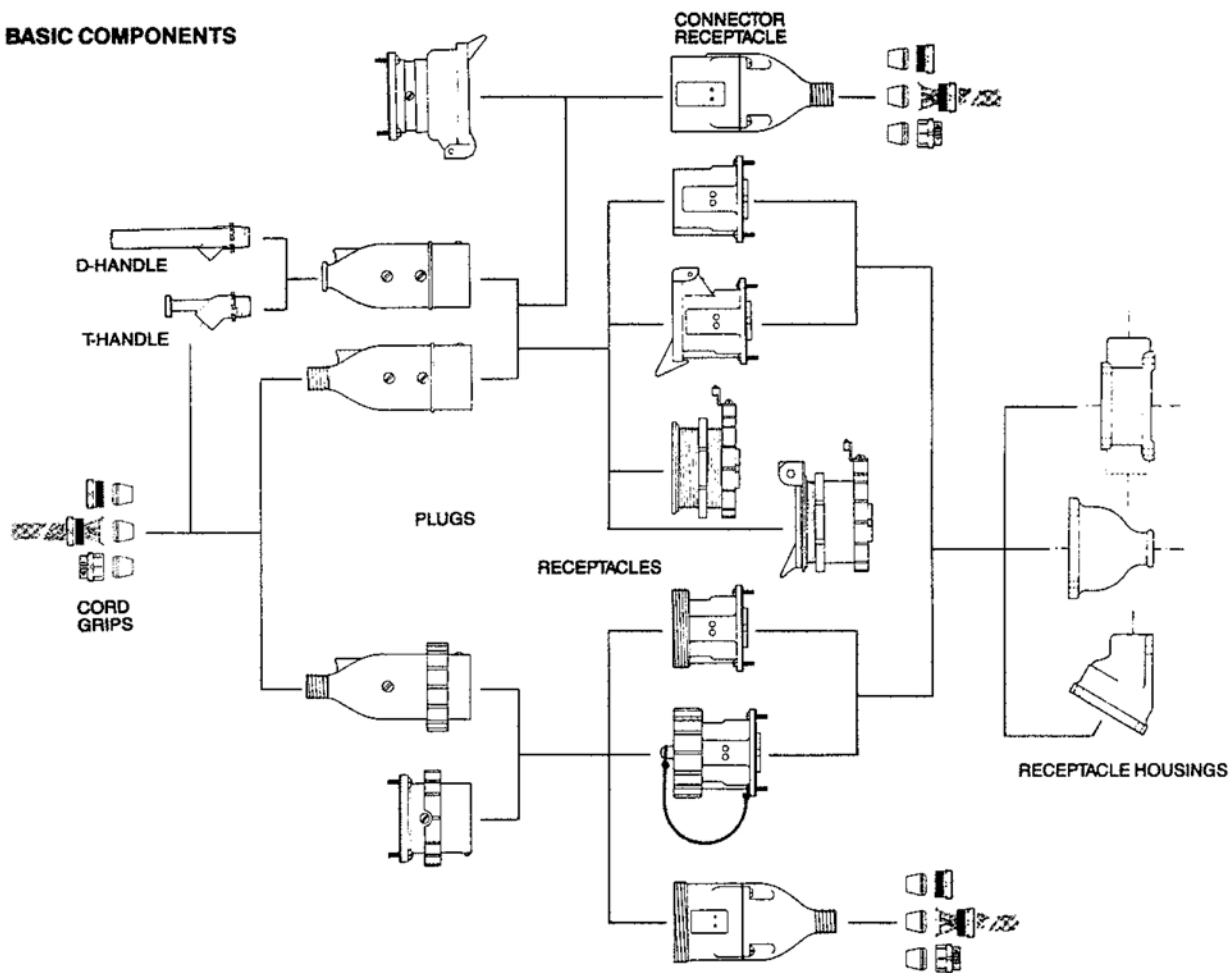

SPECIAL POLARITY FOR DIFFERENT VOLTAGES

Special polarization for locations where plugs and receptacles of the same style and number of poles is available. Consult factory to discuss your needs.

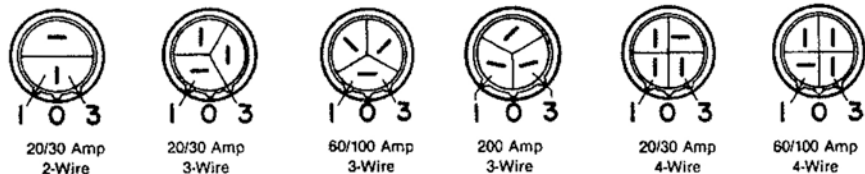


HOW TO ORDER SPECIAL POLARITY

Give the catalog number of the plug and receptacle selected from the listing pages in this bulletin and specify the polarity symbol number from the table below. To specify by catalog number substitute the polarity symbol number for the zero appearing in the third to the last position of the standard listed catalog number. EXAMPLE: JRCBB-510046 is changed to JRCBB-510146 or JRCBB-510346.

For Receptacle housings only change the last digit to the symbol number desired. EXAMPLE: JRC-4100 becomes JRC-4101 or JRC-4103.


POLARITY METHOD	KEYWAY POSITION (Viewing Female Inserts as Illustrated)	SYMBOL NUMBER
Standard	As Listed	0
Rotated Polarity	Keyway to Right (Insert Rotated Clockwise)	3
	Keyway to Left (Insert Rotated Counterclockwise)	1



INCLUDES GASKET **JRC-**



JRCBB-



JRCA-



JPD- ③

- RUST RESISTANT FERROUS ALLOY RECEPTACLES
- ALUMINUM ALLOY PLUGS
- MOLDED INSULATION

- GROUNDING THROUGH SHELL AND EXTRA POLE
- 30/60/100 AMP
- 250 VDC/600 VAC

Solder terminals are standard for line contacts. Pressure terminals are standard for ground contacts. Add suffix "PR" for pressure terminals on line side.

Catalog numbers shown are for plain plugs and receptacles with spring cover.

CIRCUIT TYPE	AMPS	PANEL MOUNT RECEPTACLE	CONDUIT SIZE (IN)	ANGLED RECEPTACLES	STRAIGHT RECEPTACLE	CABLE DIAMETER RANGE (IN)②	PLUG WITHOUT CLAMP NUT
2-Pole 3-Wire	30	JRC-330	3/4	JRCBB-23036	JRCA-23036	.250-.625 .625-1.000	JPD-53036 JPD-83036
3-Pole 4-Wire		JRC-430	1	JRCBB-33046	JRCA-33046	.375-.625 .625-1.000	JPD-53046 JPD-83046
2-Pole 3-Wire	60	JRC-360	1 1/4	JRCBB-46036	JRCA-46036	.625-1.000 1.000-1.250	JPD-86036 JPD-106036
3-Pole 4-Wire		JRC-460	1 1/2	JRCBB-56046	JRCA-56046	.625-1.000 1.000-1.375	JPD-86046 JPD-116046
2-Pole 3-Wire	100	JRC-3100	1 1/2	JRCBB-510036	JRCA-510036	1.000-1.375 1.375-1.625	JPD-1110036 JPD-1310036
3-Pole 4-Wire		JRC-4100	2	JRCBB-610046	JRCA-610046	1.000-1.375 1.375-1.750	JPD-1110046 JPD-1410046
3-Pole 4-Wire	100④	JRC-4104	1 1/2	JRCBB-510446	JRCA-51046	1.375-1.750	JPD-1410446

① Other conduit fitting bodies available. Consult factory.

② Other cable diameters and tapped-for-conduit available. Consult factory.

③ Plugs are normally supplied with an oil-resistant rubber grommet, washer and plain compression nut.


OPTIONAL STRAIN RELIEF — Add suffix "M" for Mechanical Clamp Nut. Add suffix "K" for Basket Weave.

④ Non-circuit breaking low profile plugs and receptacles.




THREADED HOUSING WITH PROTECTION COVER


For receptacles without protection cover, change "E" to "L" — (e.g.; JREBB changes to JRLBB).




JRE-



JREBB-



JREA-



JPLD- ③
WITH THREADED
COUPLING NUT

CIRCUIT TYPE	AMPS	PANEL MOUNT RECEPTACLE	CONDUIT SIZE (IN)	ANGLED RECEPTACLES	STRAIGHT RECEPTACLE	CABLE DIAMETER RANGE (IN)②	PLUG WITHOUT CLAMP NUT
2-Pole 3-Wire	30	JRE-330	3/4	JREBB-23036	JREA-23036	.250-.625 .625-1.000	JPLD-53036 JPLD-83036
3-Pole 4-Wire		JRE-430	1	JREBB-33046	JREA-33046	.375-.625 .625-1.000	JPLD-53046 JPLD-83046
2-Pole 3-Wire	60	JRE-360	1 1/4	JREBB-46036	JREA-46036	.625-1.000 1.000-1.250	JPLD-86036 JPLD-106036
3-Pole 4-Wire		JRE-460	1 1/2	JREBB-56046	JREA-56046	.625-1.000 1.000-1.375	JPLD-86046 JPLD-116046
2-Pole 3-Wire	100	JRE-3100	1 1/2	JREBB-510036	JREA-510036	1.000-1.375 1.375-1.625	JPLD-1110036 JPLD-1310036
3-Pole 4-Wire		JRE-4100	2	JREBB-610046	JREA-610046	1.000-1.375 1.375-1.750	JPLD-1110046 JPLD-1410046
3-Pole 4-Wire	100④	JRE-4104	1 1/2	JREBB-510446	JREA-51046	1.375-1.750	JPLD-1410446

① Other conduit fitting bodies available. Consult factory.

② Other cable diameters and tapped-for-conduit available. Consult factory.


③ Plugs are normally supplied with an oil-resistant rubber grommet, washer and plain compression nut.

OPTIONAL STRAIN RELIEF — Add suffix "M" for Mechanical Clamp Nut. Add suffix "K" for Basket Weave.

④ Non-circuit breaking low profile plugs and receptacles.


DIMENSIONS

Types JRC, JRE and JRL QuelArc Receptacle Housings

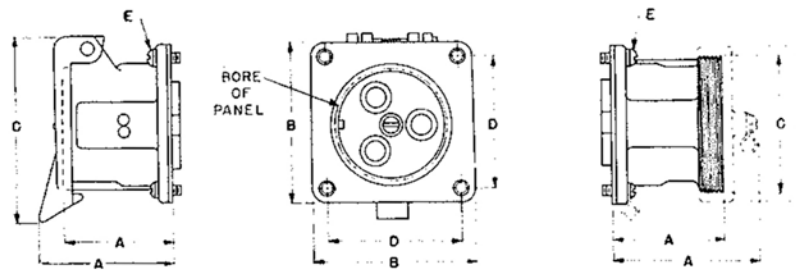


Receptacle		Housing	A	B	C	D	E	Bore of Panel
Form	No. Poles							
30	2	Spring Door	2 ¹⁷ / ₃₂	2 ¹⁵ / ₁₆	3 ³ / ₈	2 ⁷ / ₁₆	1/4—20	1 ²⁵ / ₃₂
	3 or 4	Spring Door	2 ¹⁷ / ₃₂	2 ¹⁵ / ₁₆	4 ¹ / ₁₆	2 ⁷ / ₁₆	1/4—20	2 ³ / ₃₂
	2	Plain or Threaded	2 ¹ / ₁₆	2 ¹⁵ / ₁₆	2 ¹ / ₂	2 ⁷ / ₁₆	1/4—20	1 ²⁵ / ₃₂
	3 or 4	Plain or Threaded	2 ¹ / ₁₆	2 ¹⁵ / ₁₆	3	2 ⁷ / ₁₆	1/4—20	2 ³ / ₃₂
	2	With Cap	2 ¹¹ / ₁₆	2 ¹⁵ / ₁₆	2 ³ / ₄	2 ⁷ / ₁₆	1/4—20	1 ²⁵ / ₃₂
	3 or 4	With Cap	2 ¹ / ₁₆	2 ¹⁵ / ₁₆	3 ⁷ / ₁₆	2 ⁷ / ₁₆	1/4—20	2 ³ / ₃₂
60	3 or 4	Spring Door	4 ⁹ / ₁₆	4 ³ / ₁₆	5 ⁵ / ₁₆	3 ³ / ₁₆	1/4—20	3 ³ / ₃₂
	3 or 4	Plain or Threaded	3 ⁷ / ₁₆	4 ³ / ₁₆	3 ¹ / ₂	3 ³ / ₁₆	1/4—20	3 ³ / ₃₂
	3 or 4	With Cap	4 ¹ / ₁₆	4 ³ / ₁₆	4 ³ / ₈	3 ³ / ₁₆	1/4—20	3 ³ / ₃₂
100	3 or 4	Spring Door	5 ³ / ₁₆	4 ¹ / ₂	5 ¹ / ₁₆	3 ⁷ / ₈	1/4—20	3 ¹ / ₃₂
	3 or 4	Plain or Threaded	4 ¹ / ₂	4 ¹ / ₂	4 ¹ / ₄	3 ⁷ / ₈	1/4—20	3 ¹ / ₃₂
	3 or 4	With Cap	5 ³ / ₁₆	4 ¹ / ₂	4 ⁹ / ₁₆	3 ⁷ / ₈	1/4—20	3 ¹ / ₃₂

Types JPD and JPLD QuelArc Plugs

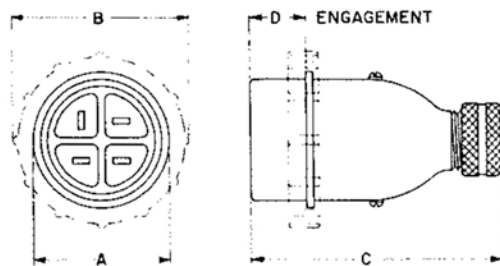


Form	No. of Poles	A	B	C	D
20 or 30	2	1 ²⁷ / ₃₂		4 ¹ / ₂ to 5	1 ¹ / ₁₆
	3 or 4	2 ⁷ / ₁₆	3 ¹ / ₃₂	4 ³ / ₄ to 5 ³ / ₈	1 ¹ / ₁₆
60	3 or 4	3 ³ / ₈	4 ¹ / ₃₂	8 to 8 ¹ / ₁₆	1 ⁷ / ₈
100	3 or 4	3 ⁷ / ₁₆	4 ⁵ / ₈	10 to 10 ³ / ₄	2 ¹ / ₁₆

Types JZC and JZL Male Receptacle Housings

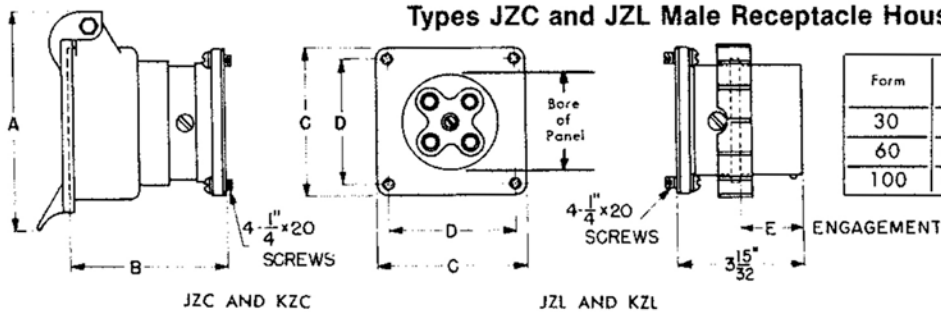

Form	A	B	C	D	E	Bore of Panel
30	3 ⁷ / ₁₆	2 ⁵ / ₁₆	2 ¹ / ₁₆	2 ⁷ / ₁₆	1 ¹ / ₁₆	1 ¹ / ₂
60	6 ¹ / ₄	3 ¹ / ₃₂	4 ³ / ₁₆	3 ³ / ₁₆	1 ⁷ / ₈	2 ³ / ₈
100	6 ⁵ / ₈	4 ¹ / ₃₂	4 ¹ / ₂	3 ⁷ / ₈	2 ¹ / ₁₆	2 ³ / ₄







Types JWPD and JWPLD QuelArc Connector Receptacles

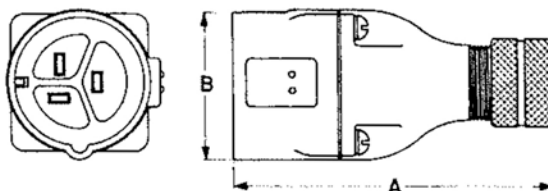

Form	Housing	Poles	A	Dia. B
30	Plain	3 or 4	6	2 ¹ / ₁₆
	Threaded	2	5 ⁵ / ₁₆	2 ¹ / ₂
		3 or 4	5 ³ / ₄	3
60	Plain	3 or 4	9 ¹ / ₈	3 ⁵ / ₈
	Threaded	3 or 4	9 ³ / ₈	3 ¹ / ₁₆
100	Plain	3 or 4	11 ¹ / ₈	4
	Threaded	3 or 4	10	4 ¹ / ₄

JR Series Conduit Boxes

Rustproofed Ferrous Alloy

Form 30 Illustrated	Type	Cat. No.	Size	Description	Size	Cat. No.	Type	Form 30 Illustrated
	JRA	JRW-13046-A JRW-23046-A JRW-33046-A	1/2 3/4 1	Take 20 and 30 Ampere Receptacles	Form 30	JRW-113046-C JRW-223046-C JRW-333046-C	JRC	
		JR-26046-A JR-36046-A JR-46046-A JR-56046-A	3/4 1 1 1/4 1 1/2	Take 60 Ampere Receptacles	Form 60	JR-336046-C JR-446046-C JR-556046-C		
		JR-410036-A JR-510036-A JR-610036-A	1 1/4 1 1/2 2	Take 100 Ampere Receptacles	Form 100	JR-4410036-C JR-5510036-C JR-6610036-C		
	JRBB	JR-13046-BB JR-23046-BB JR-33046-BB JR-43046-BB	1/2 3/4 1 1 1/4	Take 20 and 30 Ampere Receptacles	Form 30	JR-13046-B JR-23046-B JR-33046-B JR-43046-B	JRB	
		JR-26046-BB JR-36046-BB JR-46046-BB JR-56046-BB	3/4 1 1 1/4 1 1/2	Take 60 Ampere Receptacles	Form 60	JR-36046-B JR-46046-B JR-56046-B		
		JR-410036-BB JR-510036-BB JR-610036-BB	1 1/4 1 1/2 2	Take 100 Ampere Receptacles	Form 100	JR-310036-B JR-410036-B JR-510036-B JR-610036-B		
		JR-720036-BB	2 1/2 *	Take 200 Ampere Receptacles	Form 200			
	JRBE	JRW-13046-BE JRW-23046-BE JRW-33046-BE	1/2 3/4 1	Take 20 and 30 Ampere Receptacles	Form 30		JRCE	
		JR-36046-BE JR-46046-BE JR-56046-BE	1 1 1/4 1 1/2	Take 60 Ampere Receptacles	Form 60	JR-46046-CE JR-56046-CE		
		JR-510036-BE JR-610036-BE	1 1/2 2	Take 100 Ampere Receptacles	Form 100			

DIMENSIONS — JR SERIES CONDUIT BOXES

Rustproofed Ferrous Alloy

JRA and JRC

Form	Size	A	B	C	D	E	F (Dia.)
30	1/2	3 1/2	1 5/32	2 7/8	2 13/16	1 7/32	9/32
	3/4	3 1/2	1 5/32	2 7/8	2 13/16	1 7/32	9/32
	1	3 1/2	1 5/32	2 7/8	2 13/16	1 7/32	9/32
60	3/4	5 1/16	7/16	4 7/16	4 3/16	2 3/8	9/32
	1	5 1/16	7/16	4 7/16	4 3/16	2 3/8	9/32
	1 1/4	5 1/16	9/16	4 7/16	4 3/16	2 3/8	9/32
	1 1/2	5 5/16	5/8	4 7/16	4 3/16	2 5/8	9/32
100	1 1/4	5 3/8	9/16	4 3/4	4 1/2	2 5/8	9/32
	1 1/2	5 3/8	5/8	4 3/4	4 1/2	2 5/8	9/32
	2	5 3/8	5/8	4 3/4	4 1/2	3 1/8	9/32

JRB

Form	Size	A	B	C	D (Thd. Dia.)
30	1/2	2 13/16	2 7/16	2 1/2	1/4—20
	3/4	2 13/16	2 7/16	2 1/2	1/4—20
	1	2 13/16	2 7/16	2 1/2	1/4—20
	1 1/4	2 13/16	2 7/16	3 1/8	1/4—20
60	1	4 3/16	3 9/16	4 13/16	1/4—20
	1 1/4	4 3/16	3 9/16	4 13/16	1/4—20
	1 1/2	4 3/16	3 9/16	4 13/16	1/4—20
100	1	4 1/2	3 7/8	6 1/4	1/4—20
	1 1/4	4 1/2	3 7/8	6 1/4	1/4—20
	1 1/2	4 1/2	3 7/8	6 1/4	1/4—20
	2	4 1/2	3 7/8	6 1/4	1/4—20

JRBB

Form	Size	A	B	C	D	E	F (Dia.)
30	1/2	2 13/16	2 13/16	3 9/16	3 3/8	2 3/8	(2) 13/32
	3/4	2 13/16	2 13/16	3 9/16	3 5/8	2 3/8	(2) 13/32
	1	2 13/16	2 13/16	3 9/16	3 5/8	2 3/8	(2) 13/32
	1 1/4	2 13/16	2 13/16	3 9/16	3 5/8	2 3/8	(2) 13/32
60	3/4	4 3/16	4 3/32	4 3/4	4 3/8	3 3/8	(2) 13/32
	1	4 3/16	4 3/32	4 3/4	4 3/8	3 3/8	(2) 13/32
	1 1/4	4 3/16	4 3/32	4 3/8	4 3/8	3 3/8	(2) 13/32
	1 1/2	4 3/16	4 3/32	4 13/16	4 3/8	3 3/8	(2) 13/32
100	1 1/4	4 1/2	4 3/8	5 13/16	5	4	(4) 13/32
	1 1/2	4 1/2	4 3/8	5 13/16	5	4	(4) 13/32
	2	4 1/2	4 3/8	5 13/16	5	4	(4) 13/32

JRBE and JRCE

Form	Size	A	B	C	D	E	F	G (Dia.)
30	1/2	2 13/16	2 7/8	3 1/2	2 25/32	3 19/32	4 3/32	(3) 9/32
	3/4	2 13/16	2 7/8	3 1/2	2 25/32	3 19/32	4 3/32	(3) 9/32
	3/4	2 13/16	2 7/8	3 1/2	..	4 7/16	5 7/16	(2) 9/32
	1	2 13/16	2 7/8	3 1/2	2 25/32	3 19/32	4 11/32	(3) 9/32
60	1	4 3/16	3 3/8	4 1/2	5	6 3/16	5 5/16	(3) 13/32
	1 1/4	4 3/16	3 3/8	4 1/2	5	6 3/16	6	(3) 13/32
	1 1/4	4 3/16	3 3/8	4 1/2	..	6 3/16	6	(2) 13/32
	1 1/2	4 3/16	3 3/8	4 1/2	5	6 1/2	6 1/4	(3) 13/32
	1 1/2	4 3/16	3 3/8	4 1/2	..	6 3/16	6 1/4	(2) 13/32
100	1 1/2	4 1/2	3 3/8	4 3/4	5	6 3/4	6 29/32	(3) 13/32
	2	4 1/2	3 3/8	4 3/4	5	6 3/4	6 29/32	(3) 13/32

— REVERSE SERVICE — MALE RECEPTACLES AND FEMALE PLUGS 30, 60 and 100 Amp-250 Volts D.C., 600 Volts A.C.

Receptacles with male interiors and plugs with female interiors are for portable equipment where it is desirable to disconnect the portable cord at the machine. The machine is fitted with a male receptacle, which engages a female plug. The contacts of the female plug when disengaged, are fully enclosed in molded Phenolic which prevents the possibility of accidental touching of live parts.


An important advantage of installing male service receiving receptacles on portable equipment is in the use of two or more cable lengths when extra long extensions are required. The extension cord is made up of a female plug on one end, and a male plug on the other end. The female plugs listed on this page serve as extension connector receptacles, when two cables are connected together.

Receptacles fit JR Series conduit boxes (see page 6). Receptacles can also be surface mounted on sheet metal cabinets and panels. Housings have square flanges, and are mountable in any of four positions.

The products listed below have male contact interiors in the receptacles, and female contact interiors in the plugs. This arrangement is simply the reverse of the plugs and receptacles listed on the previous pages.




Hinged Spring
Door & Gasket



CIRCUIT TYPE	AMPS	MALE RECEPT'S	CABLE DIAM. RANGE	STD. FEMALE PLUGS	MALE RECEPT'S	CABLE DIAM. RANGE	THREADED FEMALE PLUGS
2-Pole 3-Wire	30	JZC-3036	.250-.625 .625-1.00	JWPD-53036 JWPD-83036	—	—	—
3-Pole 4-Wire		JZC-3046	.375-.625 .625-1.00	JWPD-53046 JWPD-83046	—	—	—
2-Pole 3-Wire	60	JZC-6036	.625-1.000 1.000-1.250	JWPD-83036 JWPD-106036	JZL-6036	.625-1.00 1.000-1.250	JWPLD-83036 JWPLD-106036
3-Pole 4-Wire		JZC-6046	.625-1.000 1.000-1.375	JWPD-83046 JWPD-114046	JZL-6046	.625-1.00 1.000-1.375	JWPLD-83046 JWPLD-116046
2-Pole 3-Wire	100	JZC-10036	1.000-1.375 1.375-1.625	JWPD-1110036 JWPD-1310036	—	—	—
3-Pole 4-Wire		JZC-10046	1.000-1.375 1.375-1.750	JWPD-1110046 JWPD-1410046	—	—	—
3-Pole 4-Wire		JRZ-10046	1.000-1.375 1.375-1.750	JWPD-1110446 JWPD-1410446	—	—	—
3-Pole 4-Wire					—	—	—

IN-LINE CONNECTOR PLUG & RECEPTACLE SETS

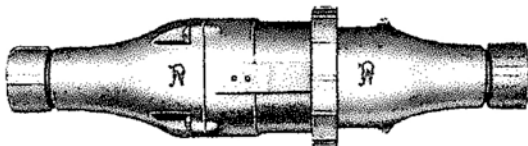


- ① Other cable ranges available. Consult factory.
② Optional strain relief available. Add appropriate suffix from note at left.
③ Non-circuit breaking low profile sets.

CIRCUIT TYPE	AMPS	CABLE DIAM. RANGE ①	COMPLETE SET W/CLAMP NUT ②
2-Pole 3-Wire	30	.250-.625 .625-1.000	JRKD-53036 JRKD-83036
3-Pole 4-Wire		.375-.625 .625-1.000	JRKD-53046 JRKD-83046
2-Pole 3-Wire	60	.625-1.000 1.000-1.250	JRKD-86036 JRKD-106036
3-Pole 4-Wire		.625-1.000 1.000-1.375	JRKD-83046 JRKD-116046
2-Pole 3-Wire	100	1.000-1.375 1.375-1.625	JRKD-1110036 JRKD-1310036
3-Pole 4-Wire		1.000-1.375 1.375-1.750	JRKD-1110046 JRKD-1410046
3-Pole 4-Wire ③		1.000-1.375 1.375-1.750	JRKD-1110446 JRKD-1410446
3-Pole 4-Wire			

Male and Female Contact Units

For Plugs and Receptacles
250 Volts, D.C.; 600 Volts, A.C.‡

	Type	Capacity	For Circuits	Cat. No.
	JR Female	20 Ampere		
		30 Ampere	3-Wire, 2-Pole 4-Wire, 3-Pole	JR-345 JR-445
		60 Ampere	3-Wire, 2-Pole 4-Wire, 3-Pole	JR-32-L JR-42-L
		100 Ampere	3-Wire, 2-Pole 4-Wire, 3-Pole	JR-33 JR-43
		200 Ampere †	3-Wire, 2-Pole	JR-34†
	JP Male	20 Ampere		
		30 Ampere	3-Wire, 2-Pole 4-Wire, 3-Pole	JP-330 JP-430
		60 Ampere	3-Wire, 2-Pole 4-Wire, 3-Pole	JP-360 JP-460
		100 Ampere	3-Wire, 2-Pole 4-Wire, 3-Pole	JP-3100 JP-4100
		200 Ampere †	3-Wire, 2-Pole	JP-34†

WIRE TERMINAL SIZES FOR QUELARC PLUG AND RECEPTACLE CONTACTS

The following table is given for determining the maximum size of bare copper to be used for plugs and receptacles in the various ampere ratings. Grounding terminals furnished are of the pressure type.

	WIRE TERMINAL DIAMETER	AMPERE RATING	WIRE TERMINAL DIAMETER
			Binding Screw Terminal
 MALE CONTACT		20	
		30	.1875
		60	.302
		100	.406
		200	.625
 FEMALE CONTACT			

† 200 ampere contact units are rated 250 volts, D.C.; 240 volts, A.C. and are interchangeable and reversible. Not Available with pressure line contacts.

Note: Solder type terminals standard for line contacts. Pressure type terminals standard for ground contacts, add suffix PR for pressure type terminals on line contacts. Price on request.


Automatic and Remote Control Contacts For Plugs and Receptacles

With some types of portable or detachable electrical equipment it may be desirable to automatically control the circuit through the insertion and withdrawal of the plug at the receptacle. Such applications may include transferring from one power source to a different power source; for example, when the plug and receptacle is used for bringing in standby service. In other applications it may be desirable to remotely control the circuit at the portable equipment by means of a push button station.

In these cases the actuating coil of the magnetic switch is connected to insulated twin auxiliary contact substituted for one

pole of the receptacle as illustrated below. A matching contact either of the jumper type for automatic control or of the insulated 2-pole type for remote control is substituted for one pole of the plug. Two additional conductors must be provided in the portable cable for the remote control arrangement.

When using automatic or remote control contacts, select plugs and receptacles having one more pole than would ordinarily be used if the special control was not desired.

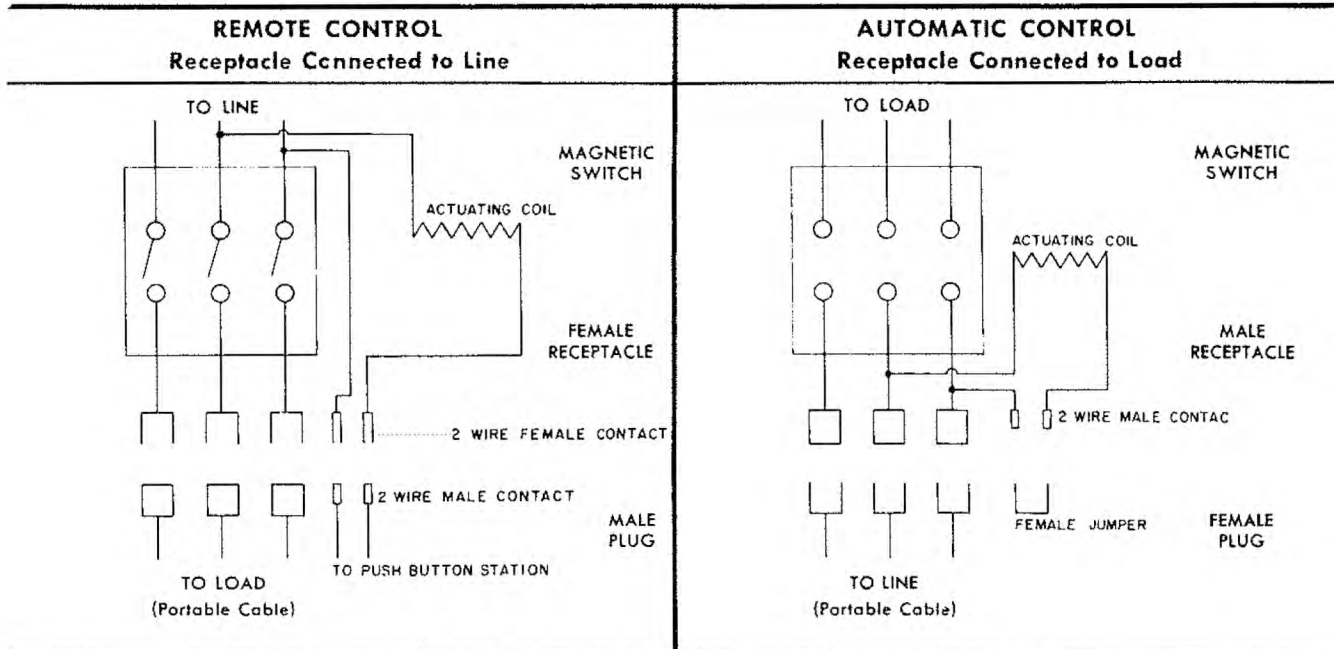

	FOR TYPE JR RECEPTACLES ALSO TYPE JW PLUGS		FOR TYPE JZ RECEPTACLES ALSO TYPE JF PLUGS	
	FEMALE 2-Wire Contact	FEMALE Jumper Contact	MALE 2-Wire Contact	MALE Jumper Contact
Substitute for One Pole of Plug and Receptacle				
Rating	Cat. No.	Cat. No.	Cat. No.	Cat. No.
60-Ampere	JR-22-RD	JR-22-R	JP-22-R	Use Male 2-Wire and apply Jumper Wire between Poles
100-Ampere		JR-23-R	JP-23-R	




QUELARC Plugs and Connectors are furnished with a set of rubber grommets, each covering one increment of the Plug or Connectors range of cable sizes as listed. The Grommet best suited to the diameter of the cable used is the one to be applied. The remaining Grommets are then discarded. Note: Excess grommets are not returnable for credit.

PLUG SIZE			RUBBER GROMMETS IN EACH PLUG SET	
Plug Rating	Compression Range For Set of Grommets	Compression Nut Cat. No.	Compression Range of Each Grommet	Cat. No.
20 and 30 Amperes	.250 to .625	DB-9-B	.250 to .375 .375 to .500 .500 to .625	DB-9-E DB-9-D DB-9-C
	.625 to .875	DB-14-B	.625 to .750 .750 to .875	DB-14-J DB-14-H
30 and 60 Amperes	.625 to 1.000	DB-14-B	.625 to .750 .750 to .875 .875 to 1.000	DB-14-J DB-14-H DB-14-C
60 Amperes	1.000 to 1.250	DB-13-B	1.000 to 1.125 1.125 to 1.250	DB-13-C DB-13-D
60 and 100 Amperes	1.000 to 1.375	DBZ-7-B	1.000 to 1.125 1.125 to 1.250 1.250 to 1.375	DBZ-718 DBZ-720 DBZ-722
100 Amperes	1.375 to 1.625	DBZ-8-B	1.375 to 1.500 1.500 to 1.625	DBZ-824 DBZ-826
	1.375 to 1.750	DBZ-8-B	1.375 to 1.500 1.500 to 1.625 1.625 to 1.750	DBZ-824 DBZ-826 DBZ-828

Other quality products by PYLE-NATIONAL

NEW PON™ SERIES with LED's LARGE INDICATOR LIGHTS

New product innovation with LED's mounted to a PC board is a unique use of LED's for indicator light applications. This series offers up to 50 times longer life than standard incandescent lamps, and has far greater tolerance to shock and vibration. These products are economical in cost and labor, as retrofitting is made simple by utilizing standard PON bases and accessories. LED's as well as acrylic globes are offered with a variety of color options. Standard voltages 110ac and 24dc, can also accommodate 12 thru 220 volts.

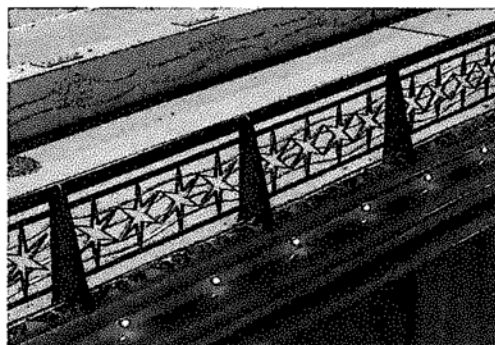

MADISON STREET BRIDGE
CHICAGO, ILLINOIS

INTERLOCKED RECEPTACLE SWITCHES/ CIRCUIT BREAKERS

Family of mechanical interlocking plugs and receptacles-single throw switches: fusible (NEMA 3R & 12), fusible/non-fusible (NEMA 3 & 5); circuit breaker enclosures: dust-tight and rain-tight; tumbler switches: explosion-proof, weather-tight (NEMA 2) and hazardous location.

